
70mm High Performance Bushfire Weepa



Installation guide for weep holes in masonry

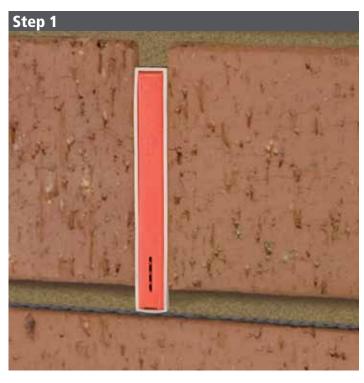

Install the Weepa between bricks or blocks, at specified intervals and firmly in contact with the flashing.


For rendering, set out a few millimetres.



When rendering, the Weepa needs to be loosened in the masonry so the renderer can adjust the Weepa in and out. Grab internal rib to adjust Weepa in and out.



After clean up, use a small, flat screwdriver to prise the mortar cover up at the bottom.

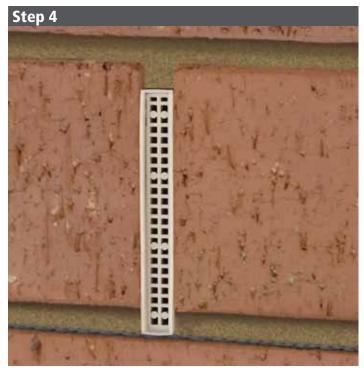

The High Performance Bushfire Weepa has a specially formulated grate (with stainless steel mesh set behind) which chars and self extinguishes.

70mm High Performance Bushfire Weepa



Installation guide for weep holes in rendered masonry





Make sure the new Weepa is installed when the masonry wall is built.



Loosen the Weepa and pull out proud of masonry.





Lay on render around the Weepa.



Screed off around the Weepa.





Pat the Weepa flush with the surface.




Float around the Weepa.



Sponge finish.
For easy
removal later,
wipe the
mortar guard
clean now,
then again
after painting.





After finish and cleanup remove the mortar guard for beautiful weepholes.

70mm High Performance Bushfire Weepa



Installation guide for weep holes in rendered lightweight panel



Mark the outline of the weep hole on each board at recommended centres and between each batten, then cut out with a jab saw.



Fix board as recommended by supplier.

Attention: Weepa does not encourage cutting out weep hole after fixing as this could compromise the waterproof membrane.



Check Weepa depth at back to ensure adequate clearance of studs and flashing.

Ventilation must not be impeded



If necessary, cut the back off the Weepa and remove dags.



Step 5

Apply recommended glue to Weepa and push into weep hole slot so it acts as formwork for coating or finish.



Smooth off excess glue. Allow to dry.



Apply render or coating.

Screed as desired.







required.
Clean the
Weepa cover
of excess
render, finish
and paint at
each stage.

Sponge as



After final finish and clean up remove cover.

End result: beautiful and functional Weepa weep holes!