

# TECHNICAL DATASHEET

## Standard Weepa (14-STDW)



Product Code: 14-STDW

### Description:


A weep hole former suitable for masonry walls. Promotes excellent cavity ventilation, protects against entry of vermin and forms a neat and attractive weep hole.

### Applications:

Provide weep holes to National Construction Code (NCC) 2025 and associated Australian Standards including AS3700:2018 and AS4773.2:2015 for masonry buildings.

### Installation:

Designed to be installed in the perpend to external leaves of cavity walls (i.e. such as cavity brick walls) directly above damp proof courses, flashing, cavity fill, and at the bottom of infill cavity. Horizontal spacing is not to exceed 1200 mm. Designs for damper climates and air-conditioned buildings could consider closer spacing for greater airflow and drier cavities.

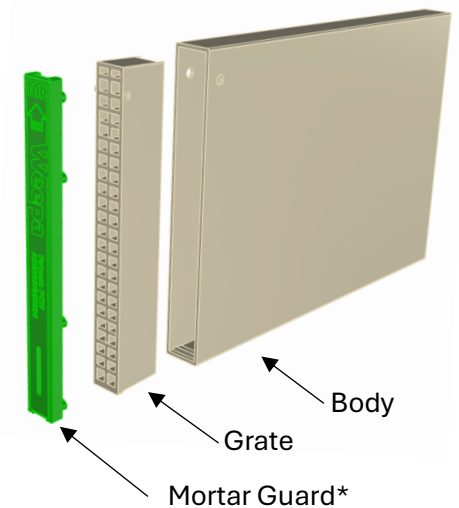


Component	Material
Body	Polypropylene (PP, recyclable)
Grate	Polyvinyl Chloride (PVC)
Mortar Guard*	Polypropylene (PP, recyclable)


  

Dimensions	104mm x 76mm x 10mm (see below)
------------	---------------------------------


**NOTE\*** - The Mortar Guard is designed to remain in place until the brick or block wall (and any rendering) is completed. The Mortar Guard should then be removed.

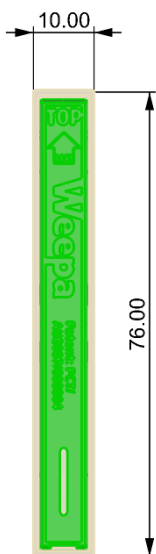

Front view

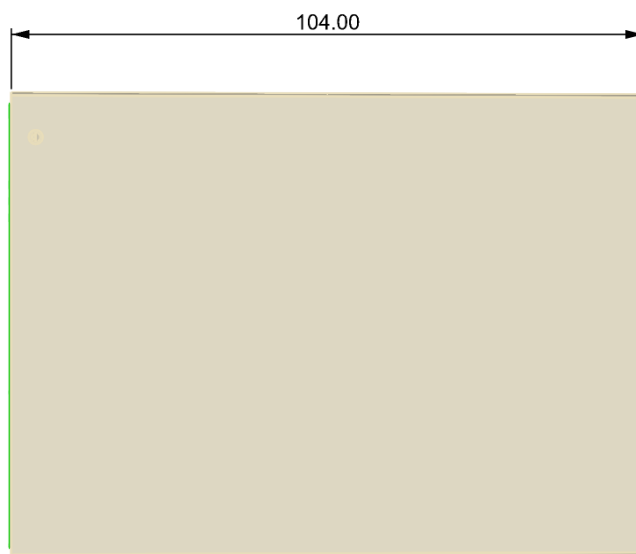

Side view

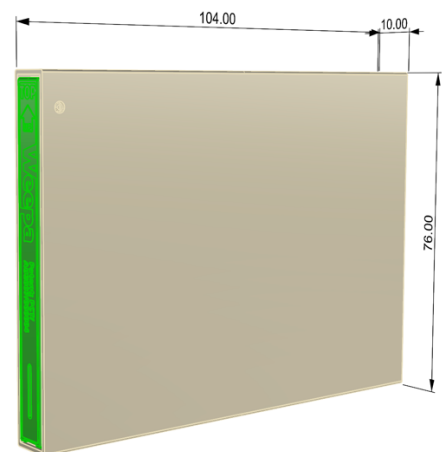

Perspective view

For more information, visit the Weepa website ([www.weepa.com.au](http://www.weepa.com.au))